



SINCE 1991

# SSH MultiPro™

## Light Commercial / Residential Roof Panel Machine



U.S. PATENT NO. 5,425,259  
U.S. PATENT NO. 6,772,616

**THE HIGH PERFORMANCE SOLUTION TO YOUR RESIDENTIAL  
AND LIGHT COMMERCIAL NEEDS.**

**SIX PANEL PROFILES IN VARIABLE WIDTHS, MULTIPLE  
GAUGES AND VARIOUS MATERIAL TYPES.**

### STANDARD FEATURES:

- New and Improved Polyurethane Drive Rollers
- Choice of one hardened Stainless Steel Forming Roller System with Shear Dies
- EZE CHANGE™ Profile Roller System
- Quick Change Power Pac™, Gas or Electric
- Computer Length & Batch Control
- Power Interruption Safety Circuit
- UL 90 Rated Panels
- Panel Recognition Safety Photo Eye
- Hydraulic Drive and Shear
- Length Control Limit Switch
- Two Sets of Bead, Pencil, or V Rib Rollers
- Push Button RUN/JOG Controls at Entry and Exit Ends
- Welded Tubular Steel Frame


New Tech Machinery Corp. • 1300 40th St. • Denver CO 80205

PH: 303-294-0538 • Toll Free: 1-800-574-1717 • Fax: 303-294-9407 • Email: [sales@newtechmachinery.com](mailto:sales@newtechmachinery.com)

[www.newtechmachinery.com](http://www.newtechmachinery.com)

# OPTIONS

<b>TR12</b>	12,000 lb. (5,500 kg) Capacity NATM Compliant Tandem Axle Trailer, with Crane Lifting Eyes, Four-Drop Foot Stabilizing Jacks and Elec. Brakes with Breakaway Kit	<b>RR1</b>	Bead Rollers
<b>DR1</b>	Machine Mounted Dual Overhead Reel Rack	<b>RR2/4</b>	Pencil Rib Rollers (Large/Small)
<b>DR01-16</b>	Decoiler Reel 16" (400mm) ID	<b>RR3/5</b>	V Rib Rollers (Large/Small)
<b>DR01-20</b>	Decoiler Reel 20" (500mm) ID	<b>RR6</b>	Striation Rollers
<b>EXA</b>	Expandable Arbor (16" to 20" ID) (400mm to 500mm)	<b>QCPP-E Quick Change Power Pac™</b> - Electric	• 7.5 Hp, 220VAC, 60 Hz, 3Ph, 18 Amps • 5 Hp, 220VAC, 50 or 60 Hz, 1Ph, 30 Amps
<b>ROS1</b>	Ten Ft. (3m) Sections of Variable Height Run Out Table	<b>QCPP-G Quick Change Power Pac™</b> - Gas	16 Hp Electric Start Engine
		<b>FSD1</b>	Single Free Standing Decoiler

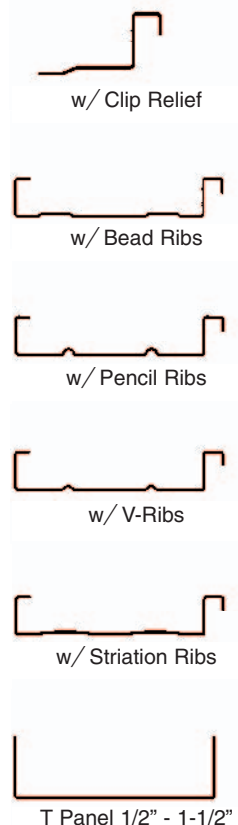


## PROFILES - EZE CHANGE™

Hardened Stainless Steel forming rollers mounted on bars w/ shear dies included.

- T-Panel** 1/2" to 1-1/2" high (12.7mm to 38.1mm)
- SSH100\*†** 1" high x 1/2" wide (25.4mm x 12.7mm) mechanically seamed panel.  
Includes a hand seamer
- SSH150\*†** 1-1/2" high x 1/2" wide (38.1mm x 12.7mm) mechanically seamed panel.  
Includes a hand seamer
- SSH450\*** 1-1/2" high x 1/4" wide (38.1mm x 6.4 mm) snap clip panel
- FFH100** 1" snap seam (25.4mm) with slotted fastener flange for clipless installation.  
Includes clip relief rollers and automatic "no chip" rotary slotter
- SSHBP** 1" or 1-1/2" leg (25.4mm or 38.1mm) Bermuda Panel


\* Can make T-Panel † Suitable for Zinc

<b>SSH PANEL MACHINE</b>	<b>DRIVE</b>
Length 12' 10" (3.9m)	Hydraulically Driven Polyurethane Rollers
Width 3' 10" (1.2m)	
Height 4' 3" (1.3m) w/ Over Head Rack	<b>SHEAR</b>
2' 0" (.6m) w/o Over Head Rack	Hydraulically Powered, Infinitely Adjustable, Hardened Tool Steel Blades and Dies Panel Recognition Safety Photo Eye
Weight 2200 lbs. (1000kg)	
<b>SSH ON TRAILER</b>	<b>COIL WIDTH</b>
Length 17' 6" (5.3m)	14" to 24" (350mm to 600mm)
Width 7' (2.1m)	
Height 6' 3" (1.9m) with reel	<b>MATERIALS FORMED</b>
Weight 3800 lbs. (1700kg)	Steel 30 ga. to 24 ga. (.3mm to .6mm) (painted, galvanized, aluminized)
<b>SPEED</b>	Aluminum .019" to .040" (.5mm to 1.0mm)
60 ft/min (18m/min) Approx.	Copper 16 oz. to 20 oz. 3/4 Hard (.5mm to .7mm)

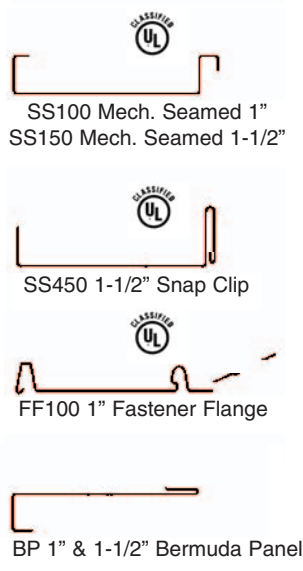


- Limited three year parts / one year labor
- Limited lifetime separation on drive rollers
- Limited lifetime on stainless steel forming rollers

CLASSIFIED UL = UL 90 RATED



Run Out Table



Quick Change Power Pac™



Electronic Controller



EZE CHANGE™ System