



SINCE 1991

SSH MultiPro™

Light Commercial / Residential Roof Panel Machine



U.S. PATENT NO. 5,425,259
U.S. PATENT NO. 6,772,616

**THE HIGH PERFORMANCE SOLUTION TO YOUR RESIDENTIAL
AND LIGHT COMMERCIAL NEEDS.**

**SIX PANEL PROFILES IN VARIABLE WIDTHS, MULTIPLE
GAUGES AND VARIOUS MATERIAL TYPES.**

STANDARD FEATURES:

- New and Improved Polyurethane Drive Rollers
- Choice of one hardened Stainless Steel Forming Roller System with Shear Dies
- EZE CHANGE™ Profile Roller System
- Quick Change Power Pac™, Gas or Electric
- Computer Length & Batch Control
- Power Interruption Safety Circuit
- UL 90 Rated Panels
- Panel Recognition Safety Photo Eye
- Hydraulic Drive and Shear
- Length Control Limit Switch
- Two Sets of Bead, Pencil, or V Rib Rollers
- Push Button RUN/JOG Controls at Entry and Exit Ends
- Welded Tubular Steel Frame


New Tech Machinery Corp. • 1300 40th St. • Denver CO 80205

PH: 303-294-0538 • Toll Free: 1-800-574-1717 • Fax: 303-294-9407 • Email: sales@newtechmachinery.com

www.newtechmachinery.com

OPTIONS

TR12	12,000 lb. (5,500 kg) Capacity NATM Compliant Tandem Axle Trailer, with Crane Lifting Eyes, Four-Drop Foot Stabilizing Jacks and Elec. Brakes with Breakaway Kit	RR1	Bead Rollers
DR1	Machine Mounted Dual Overhead Reel Rack	RR2/4	Pencil Rib Rollers (Large/Small)
DR01-16	Decoiler Reel 16" (400mm) ID	RR3/5	V Rib Rollers (Large/Small)
DR01-20	Decoiler Reel 20" (500mm) ID	RR6	Striation Rollers
EXA	Expandable Arbor (16" to 20" ID) (400mm to 500mm)	QCPP-E Quick Change Power Pac™ - Electric	• 7.5 Hp, 220VAC, 60 Hz, 3Ph, 18 Amps • 5 Hp, 220VAC, 50 or 60 Hz, 1Ph, 30 Amps
ROS1	Ten Ft. (3m) Sections of Variable Height Run Out Table	QCPP-G Quick Change Power Pac™ - Gas	16 Hp Electric Start Engine
		FSD1	Single Free Standing Decoiler

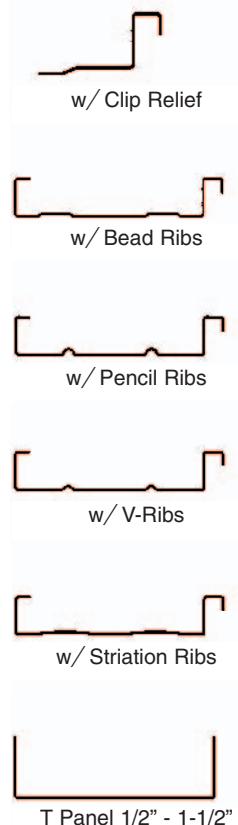


PROFILES - EZE CHANGE™

Hardened Stainless Steel forming rollers mounted on bars w/ shear dies included.

- T-Panel** 1/2" to 1-1/2" high (12.7mm to 38.1mm)
- SSH100*†** 1" high x 1/2" wide (25.4mm x 12.7mm) mechanically seamed panel.
Includes a hand seamer
- SSH150*†** 1-1/2" high x 1/2" wide (38.1mm x 12.7mm) mechanically seamed panel.
Includes a hand seamer
- SSH450*** 1-1/2" high x 1/4" wide (38.1mm x 6.4 mm) snap clip panel
- FFH100** 1" snap seam (25.4mm) with slotted fastener flange for clipless installation.
Includes clip relief rollers and automatic "no chip" rotary slotter
- SSHBP** 1" or 1-1/2" leg (25.4mm or 38.1mm) Bermuda Panel


* Can make T-Panel † Suitable for Zinc

SSH PANEL MACHINE	DRIVE
Length 12' 10" (3.9m)	Hydraulically Driven Polyurethane Rollers
Width 3' 10" (1.2m)	
Height 4' 3" (1.3m) w/ Over Head Rack	SHEAR
2' 0" (.6m) w/o Over Head Rack	Hydraulically Powered, Infinitely Adjustable, Hardened Tool Steel Blades and Dies
Weight 2200 lbs. (1000kg)	Panel Recognition Safety Photo Eye
SSH ON TRAILER	COIL WIDTH
Length 17' 6" (5.3m)	14" to 24" (350mm to 600mm)
Width 7' (2.1m)	
Height 6' 3" (1.9m) with reel	MATERIALS FORMED
Weight 3800 lbs. (1700kg)	Steel 30 ga. to 24 ga. (.3mm to .6mm) (painted, galvanized, aluminized)
SPEED	Aluminum .019" to .040" (.5mm to 1.0mm)
60 ft/min (18m/min) Approx.	Copper 16 oz. to 20 oz. 3/4 Hard (.5mm to .7mm)

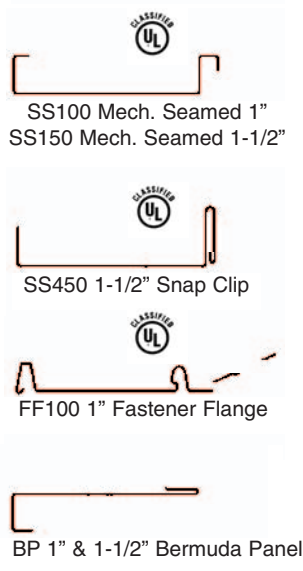


- Limited three year parts / one year labor
- Limited lifetime separation on drive rollers
- Limited lifetime on stainless steel forming rollers

CLASSIFIED UL = UL 90 RATED

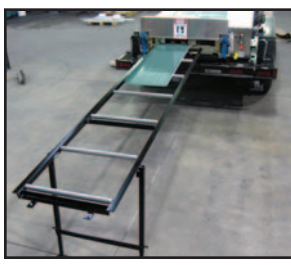

Run Out Table

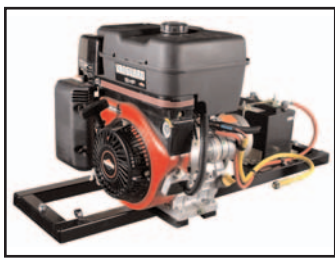

Quick Change Power Pac™



Electronic Controller



EZE CHANGE™ System