




SINCE 1991

SSR MultiPro Jr.™

Residential Roof Panel Machine

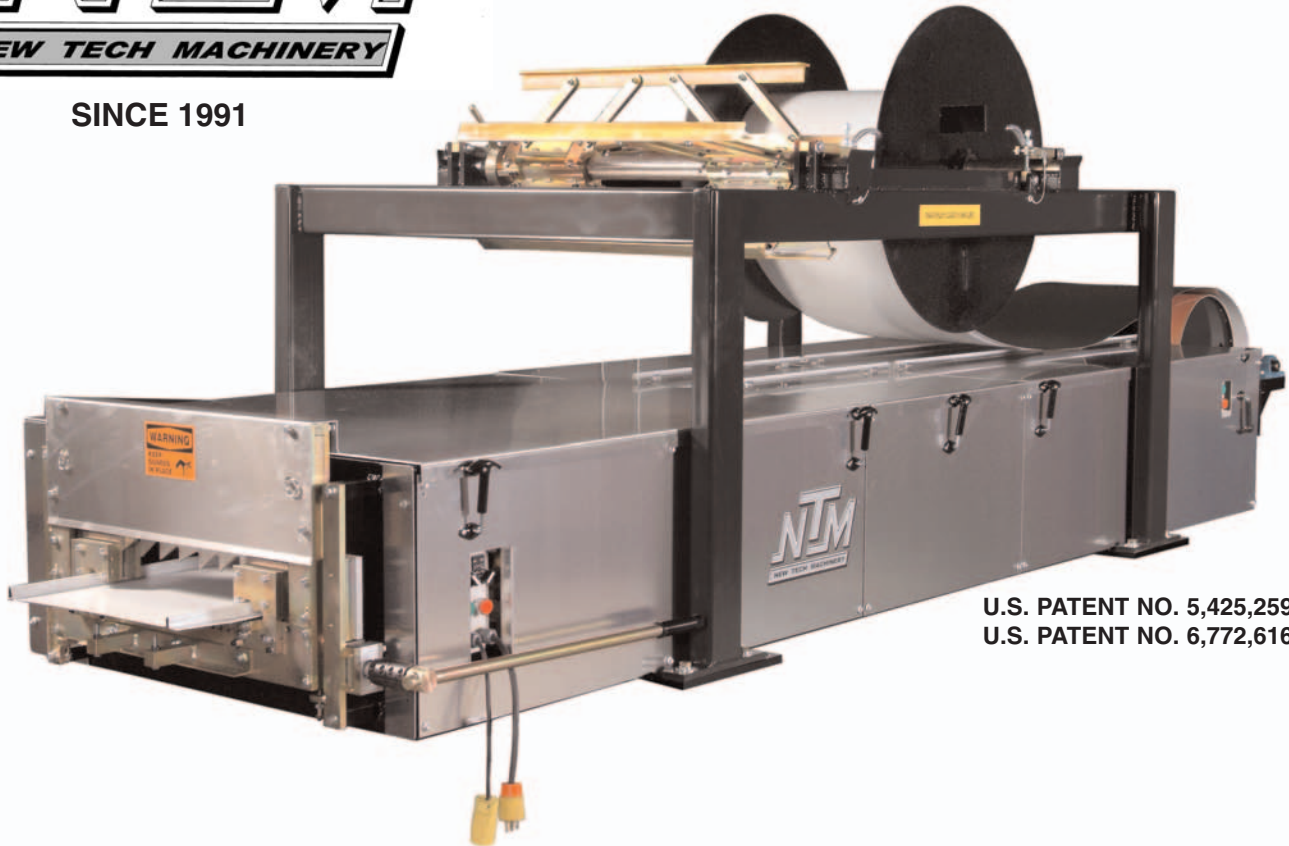

U.S. PATENT NO. 5,425,259
U.S. PATENT NO. 6,772,616

The first truly economical solution to metal roofing.

VERSATILE. . . INNOVATIVE. . . DEPENDABLE. . . PROFITABLE

The state-of-the-art SSR MultiPro Jr.™ Panel Machine runs up to 6 panel profiles in variable widths, multiple gauges and various material types.

STANDARD FEATURES:

- New and Improved Polyurethane Drive Rollers
- Hardened Stainless Steel Forming Roller System with Shear Dies
- EZE CHANGE™ Profile Replacement System
- Waterproof NEMA 4 Electrical System
- Power Interruption Safety Circuit
- Forward Pulling, Easy Cut Shear
- UL 90 Rated Panels
- Push Button RUN/JOG Controls at Entry and Exit Ends
- 100 Foot, 10 Ga., 20 Amp Extension Cord
- Length Control Limit Switch
- Two Sets of Bead, Pencil, or V Rib Rollers
- Electric Motor
- Welded Tubular Steel Frame

New Tech Machinery Corp. • 1300 40th St. • Denver CO 80205

PH: 303-294-0538 • Toll Free: 1-800-574-1717 • Fax: 303-294-9407 • Email: sales@newtechmachinery.com

www.newtechmachinery.com

OPTIONS


TR12	12,000 lb. (5,500 kg) Capacity NATM Compliant Tandem Axle Trailer, with Crane Lifting Eyes, Four-Drop Foot Stabilizing Jacks and Elec. Brakes with Breakaway Kit	ROSRI10	Ten Ft. (3m) Sections of Variable Height Run Out Table
DR2M	Machine Mounted Dual Overhead Reel Rack	CR	Clip Relief Rollers
DR01-16	Decoiler Reel 16" (400mm) ID	RR1	Bead Rollers
DR01-20	Decoiler Reel 20" (500mm) ID	RR2/4	Pencil Rib Rollers (Large/Small)
EXA	Expandable Arbor (16" to 20" ID) (400mm to 500mm)	RR3/5	V Rib Rollers (Large/Small)
		RR6	Striation Rollers
		ELEC1	1.5 Hp, 120VAC, 60 Hz, 1Ph, 18A
		ELEC2	1.5 Hp, 220VAC, 60 Hz, 1Ph, 9A
		ELEC3	1.5 Hp, 220VAC, 50 Hz, 1Ph, 9A
		FSD1	Single Free Standing Decoiler

PROFILES - EZE CHANGE™


Hardened Stainless Steel forming rollers mounted on bars w/shear dies included.

T-Panel	1/2" to 1-1/2" high (12.7mm to 38.1mm)
SSR100*†	1" high x 1/2" wide (25.4mm x 12.7mm) mechanically seamed panel. Includes a hand seamer
SSR150*†	1-1/2" high x 1/2" wide (38.1mm x 12.7mm) mechanically seamed panel. Includes a hand seamer
SSR450*	1-1/2" high x 1/4" wide (38.1mm x 6.4 mm) snap clip panel
FFR100	1" snap seam (25.4mm) with slotted fastener flange for clipless installation. Includes clip relief rollers and automatic "no chip" rotary slotter
SSRBP	1" or 1-1/2" leg (25.4mm or 38.1mm) Bermuda Panel


* Can make T-Panel † Suitable for Zinc

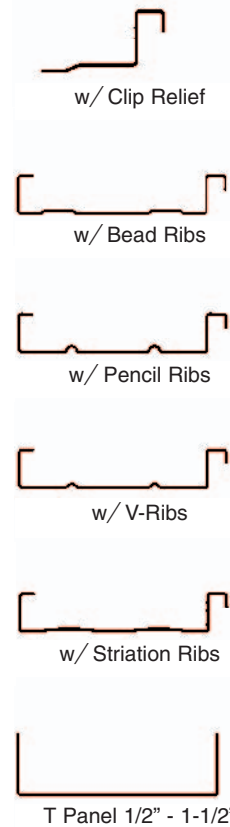

<p>SSR PANEL MACHINE</p> <p>Length 12' 10" (3.9m) Width 3' 10" (1.2m) Height 4' 3" (1.3m) w/ Over Head Rack 1' 10" (.6m) w/o Over Head Rack Weight 2200 lbs. (1000kg)</p> <p>SSR ON TRAILER</p> <p>Length 17' 6" (5.3m) Width 7' (2.1m) Height 6' 3" (1.9m) with reel Weight 3800 lbs. (1700kg)</p> <p>SPEED 30 ft/min (9m/min) Approx.</p>	<p>DRIVE Electrically Driven Polyurethane Rollers</p> <p>SHEAR Manually Powered, Infinitely Adjustable, Hardened Tool Steel Blades and Dies</p> <p>COIL WIDTH 15" to 20" (380mm to 500mm)</p> <p>MATERIALS FORMED</p> <p>Steel 30 ga. to 24 ga. (.3mm to .6mm) (painted, galvanized, aluminized)</p> <p>Aluminum .019" to .040" (.5mm to 1.0mm)</p> <p>Copper 16 oz. to 20 oz. 3/4 Hard (.5mm to .7mm)</p>
--	--

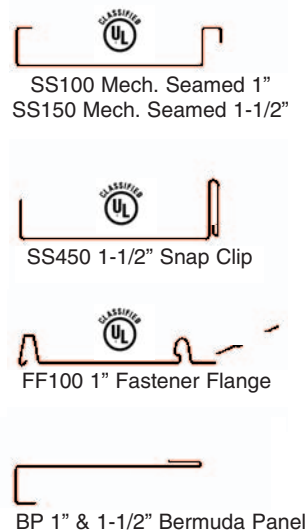

- Limited three year parts / one year labor
- Limited lifetime separation on drive rollers
- Limited lifetime on stainless steel forming rollers

 = UL 90 RATED



Waterproof Electrical



Run Out Table



EZE CHANGE™ System



Trailer